


# Bits, bytes and digital information

Lecture 2 - COMPSCI111/111G SS 2018

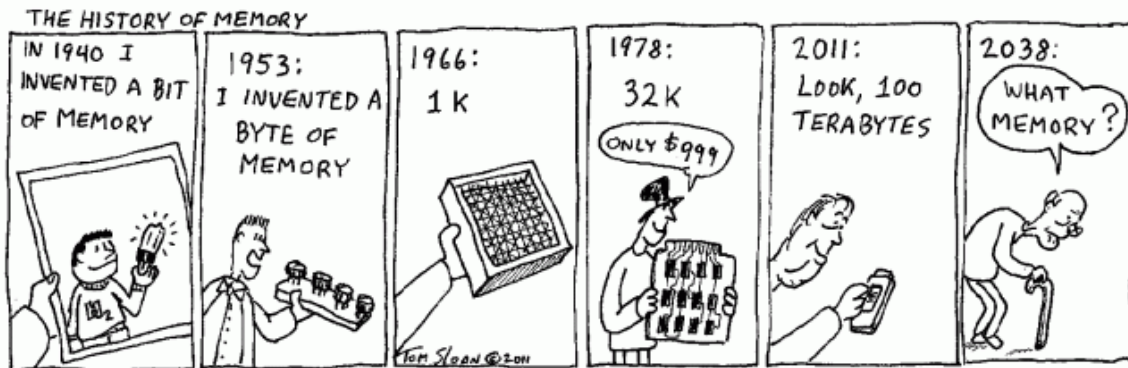


# Today's lecture

- ▶ Understand the difference between analogue and digital information
- ▶ Convert between decimal numbers and binary numbers

# Analogue vs digital information


- ▶ Information in the real world is continuous

- ▶ Continuous signal

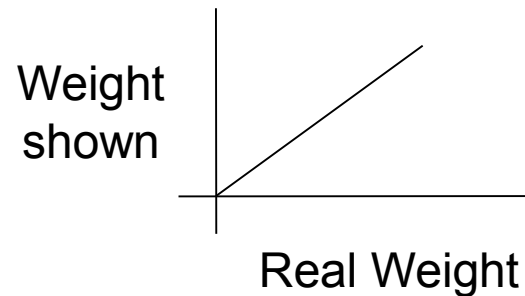

- ▶ Information stored by a computer is digital


- ▶ Represented by discrete numbers

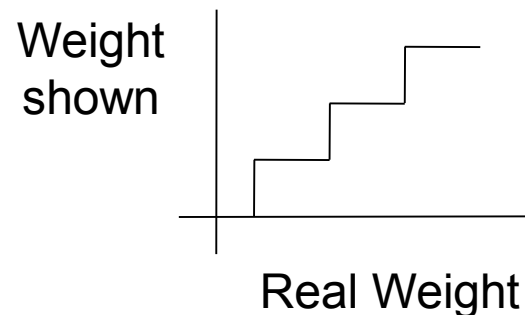



# Encoding information

## ► Sound information

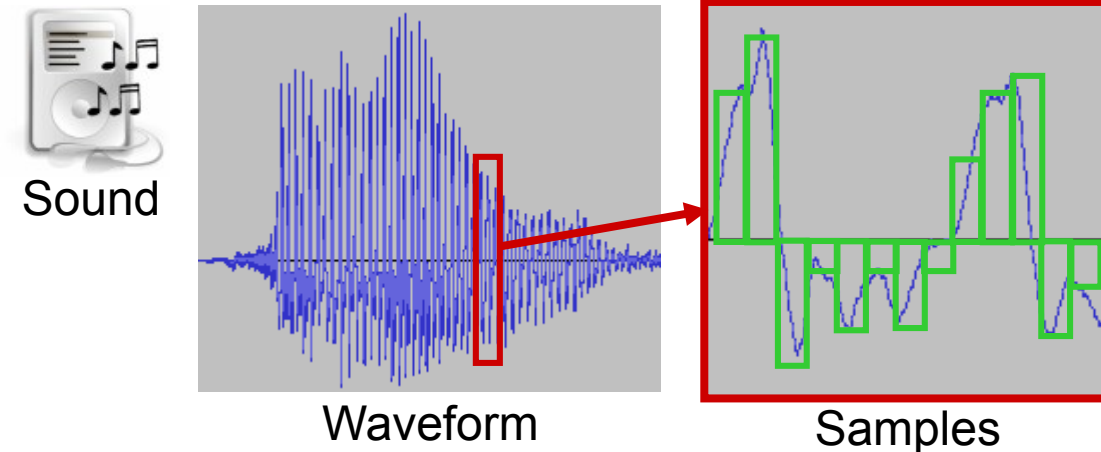

1. Give each sample a number (height of green box).
2. Let the computer move the loudspeaker membrane according to the samples.

# Numbers and Computing

- ▶ Numbers are used to represent all information manipulated by a computer.
- ▶ Computers use the binary number system:
  - Binary values are either 0 or 1.
- ▶ We use the decimal number system:
  - 0 to 9 are decimal values.


# Number Systems

## ▶ Base:

- Specifies the number of digits used by the system.
- Binary is base 2.
- Decimal is base 10.

## ▶ Positional notation:

- Describes how numbers are written.

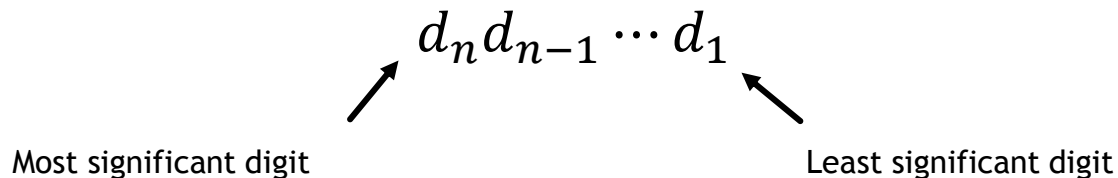

# Positional Notation

- ▶ Any number can be expressed as:

$$d_n * b^{n-1} + d_{n-1} * b^{n-2} + \dots + d_1 * b^0$$

where  $d_i$  is the digit at position  $i$ , and  $b$  is the base.



# Decimal Examples

▶ 657

$$6 * 10^2 + 5 * 10^1 + 7 * 10^0$$



$$600 + 50 + 7 = 657$$

▶ 9308

$$9 * 10^3 + 3 * 10^2 + 0 * 10^1 + 8 * 10^0$$



$$9000 + 300 + 0 + 8 = 9308$$



# Exercises

The following two questions relate to dials that have 10 different states, as discussed in the previous slide.

- ▶ Given a machine that uses 4 dials, how many different numbers can we represent?
- ▶ If we want to represent 256 different values, how many dials do we need?

# Switches

- ▶ A dial is complicated.
  - Each dial has 10 different states (0 - 9).
  - Physically creating circuits that distinguish all states is complicated.
  - Would need to distinguish 10 different strengths of electricity (voltages).

- ▶ Switches are simple.
  - Each switch is off or on (0 or 1).
  - Physically creating the circuits is easy.
  - Switch off: electrical current cannot flow.
  - Switch on: electrical current can flow.



# Bits and Bytes

- ▶ Each binary number is known as a **Binary digit**, or bit.
- ▶ A bit can be either a 0 or a 1



0



1

- ▶ Bits are used in groups.



0 0 1

3 bits



0 0

2 bits

- ▶ A group of eight bits is referred to as a **byte**.

# Using Binary Numbers

How many different values/states can we have with:

1 bit:



0



1

2 bits:



00



01



10



11

3 bits:



000



001



010



011



100



101



110



111

# Exercises

- ▶ How many different values can we represent with a byte?
  
- ▶ If we want to represent 30 different values, how many bits would we need?

# Converting binary to decimal

► 110

$$1 * 2^2 + 1 * 2^1 + 0 * 2^0$$



$$4 + 2 + 0 = 6$$

► 10110

$$1 * 2^4 + 0 * 2^3 + 1 * 2^2 + 1 * 2^1 + 0 * 2^0$$



$$16 + 0 + 4 + 2 + 0 = 22$$



# Converting from decimal to binary

## ► 35

2	35	
2	17	1
2	8	1
2	4	0
2	2	0
2	1	0
	0	1

Read the remainders  
from the bottom up.

► 35 is 100011 in binary

## ► 106

2	106	
2	53	0
2	26	1
2	13	0
2	6	1
2	3	0
2	1	1
	0	1

Read the remainders  
from the bottom up.

► 106 is 1101010 in binary



# Prefixes

- ▶ A group of 8 bits is a **byte**
  - ▶ A group of 4 bits is a **nibble**
- ▶ Bytes are the common unit of measurement for memory capacity
- ▶ There are two sets of prefixes:
  - ▶ Decimal
  - ▶ Binary

# Decimal prefixes

$10^n$	Prefix	Symbol	Decimal
1	none		1
$10^3$	kilo	K	1000
$10^6$	mega	M	1,000,000
$10^9$	giga	G	1,000,000,000
$10^{12}$	tera	T	1,000,000,000,000
$10^{15}$	peta	P	1,000,000,000,000,000
$10^{18}$	exa	E	1,000,000,000,000,000,000
$10^{21}$	zetta	Z	1,000,000,000,000,000,000,000

# Binary prefixes

$2^n$	Prefix	Symbol	Decimal
$2^0$	none		1
$2^{10}$	kibi	Ki	1024
$2^{20}$	mebi	Mi	1,048,576
$2^{30}$	gibi	Gi	1,073,741,824
$2^{40}$	tebi	Ti	1,099,511,627,776
$2^{50}$	pebi	Pi	1,125,899,906,842,624
$2^{60}$	exbi	Ei	1,152,921,504,606,846,976
$2^{70}$	zebi	Zi	1,180,591,620,717,411,303,424


# Prefixes in Computer Science

- ▶ Both decimal and binary prefixes are used in Computer Science
- ▶ Decimal prefixes are preferred because they are easier to calculate, however binary prefixes are more accurate

Binary prefix	Decimal prefix	Value (bytes)
8 bits	1 byte	same
1 KiB (1 x 2 <sup>10</sup> bytes)	1 KB (1 x 10 <sup>3</sup> bytes)	1024 ≠ 1000
1 MiB (1 x 2 <sup>20</sup> bytes)	1 MB (1 x 10 <sup>6</sup> bytes)	1,048,576 ≠ 1,000,000

# Example - hard disk sizes

- ▶ A 160GB hard disk is equivalent to 149.01GiB
  - ▶  $160\text{GB} = 160 \times 10^9$
  - ▶  $149.01\text{GiB} = (160 \times 10^9) \div 2^{30}$

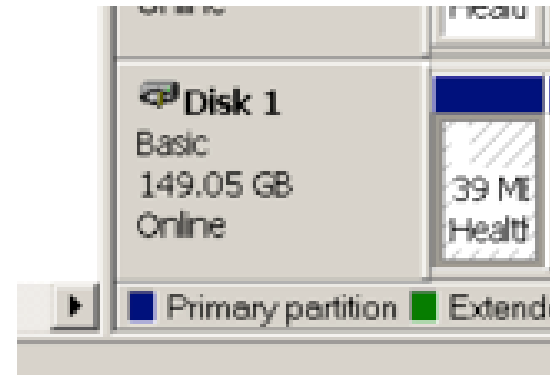





# Summary

- ▶ Computers use the binary number system
  - ▶ We can convert numbers between decimal and binary
- ▶ Decimal prefixes and binary prefixes are used for counting large numbers of bytes